



INSTALLATION

PRO-R HYPERCHARGER

9324

COMPLETE AIR CLEANER ONLY

FITS: THIS IS A COMPLETE AIR CLEANER ASSEMBLY (CV BOLT PATTERN) THAT CAN BE USED WITH ADAPTERS, BRACKETS, OR MOUNTING KITS TO COVER APPLICATIONS FOR WHICH WE DO NOT OFFER A COMPLETE KIT.

PART#	INCLUDED
600204	1 Pro-R Hypercharger Assembly with Filters and Velocity Ring
600145	1 Pro-R Hypercharger Kit to include the following
400086	1 16" 5/32 Rubber Vacuum Hose
400840	1 Black Nylon Hose Fitting
400517	2 Gasket without Adhesive
400518	1 Gasket with Adhesive
200150	3 1/4"-20 X 5/8 S.H.C.S. with Patch
309324	1 Installation Instructions

THANK YOU FOR CHOOSING KURYAKYN!

NOTE

This Pro-R Hypercharger can be used in a variety of air cleaner applications using a proper mounting bracket (that Kuryakyn carries) and vacuum source.

PROCEDURE

STEP 1 Remove the two socket head cap screws that secure the bearing caps for the butterfly shaft to the front of the Pro-R Hypercharger case using a 7/64" Allen wrench. These will be the upper and lower, outer most socket head cap screws. Using a 5/32" Allen wrench, remove the three button socket cap screws that hold the front of the Pro-R Hypercharger case to the back half. Remove the front half of the Pro-R Hypercharger.

STEP 2 Insert the three 1/4"-20 socket head cap screws through the mounting holes in the Hypercharger from the inside. Remove the adhesive backing from one of the intake gaskets, and place it over the three mounting screws now protruding from the back of the Hypercharger. **DO NOT** place a bolt through the float bowl vent hole – this hole is the one in the 10-o'clock position.

STEP 3 Position the black plastic velocity ring into position so that the hole lines up with the empty float bowl vent hole. Reassemble the two halves of the Pro-R Hypercharger in the reverse fashion as they were separated.

STEP 4 After mounting the Hypercharger connect the vacuum hose from the vacuum pod on the back of the Hyper to a proper vacuum source. This source can be found or created between the throttle body and engine in the manifold.

STEP 5 The butterflies will be open when engine is not running. The vacuum pulls the butterflies towards the closed position under high vacuum.

Ride On!

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

WARRANTY

Kuryakyn™ warrants that any Kuryakyn product sold hereunder, if properly installed, maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of one (1) year from the date the Kuryakyn products are sold to the customer.


CONSEQUENTIAL DAMAGES:
Kuryakyn shall not be liable for any consequential or incidental damages.

ABOUT OUR CATALOG

You'll find all our innovations for HD, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2004 Kuryakyn USA™ All Rights reserved.

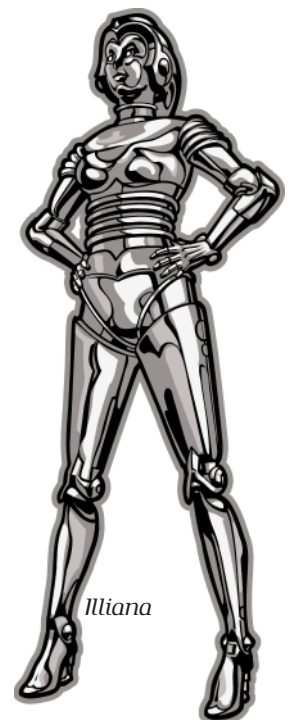

Illiana

kuryakyn.com